



COURT CONSTRUCTION & ENVIRONMENT

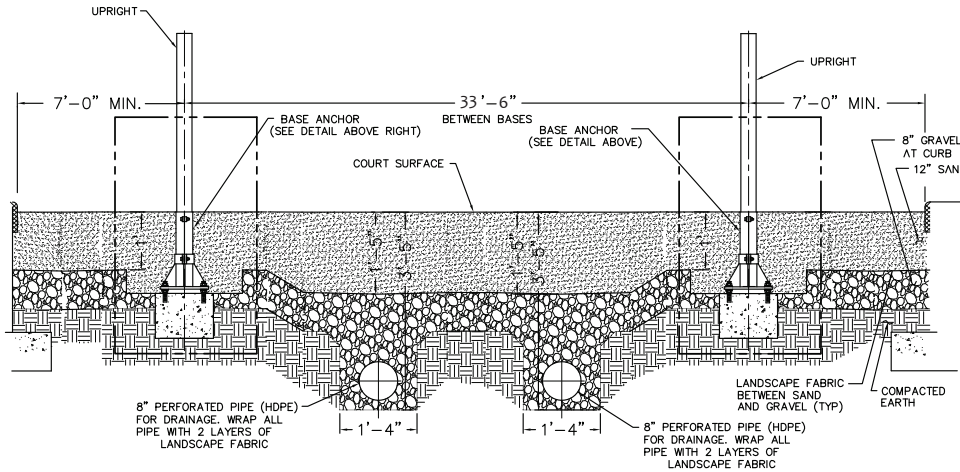

High quality sand volleyball facilities engage an architect and maintenance group during planning and construction to avoid complications with drainage, safety and anchoring of net system. Layout, design and cost of court may be affected by soil characteristics, drainage, type and depth of sand, etc.

- Excavation
- Drainage
- Court Layout - space between courts & obstructions near free zone
- Spectator Seating
- Scoreboard
- Rinse Area
- Site Lighting

COURT DIAGRAM & DIMENSIONS

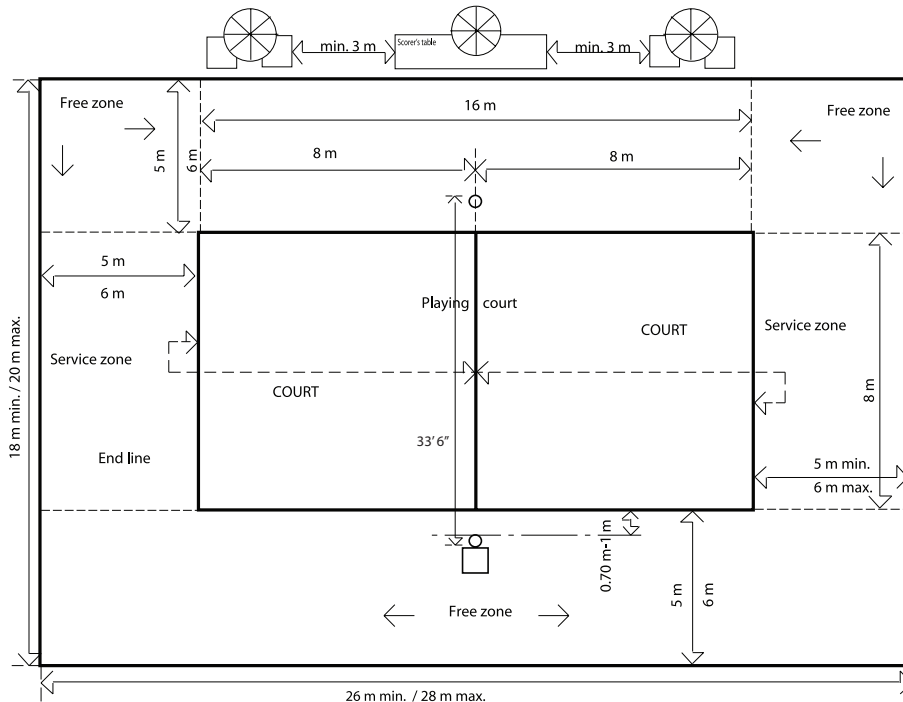


- NCAA court: 8x16 meters (26.25 x 52.49 ft.) for competitive doubles court
- Free zone: 5-6 meters (16.41-19.69 ft.) on each side of court
- Vertical free space: 12.5 meters (41.01 ft.) free from obstruction
- Depth of sand: recommend 18 in. on court and 12 in. minimum in free space


SPORTS IMPORTS SAND NET SYSTEM

- (2) SV15 Sand Volleyball Uprights - (Pin-Stop)
- (1) HDNR Heavy Duty Net Ratchet
- (2) SVP1 Sand Volleyball Upright Safety Pads
- (1) SVN Sand Volleyball Net
- (1) NA2 Net Antennae (Set)
- (1) SV99 Sand Volleyball Official Stand
- (1) SVOP Sand Volleyball Official Stand Padding
- (1) CBM1 Sand Court Boundary Lines - CBM1
- (2) SVA Sand Anchor System


ANCHORING SYSTEMS

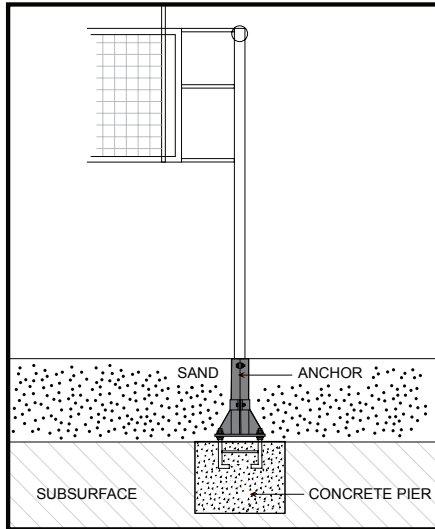

Sand Anchor System –
installation with a cement pier

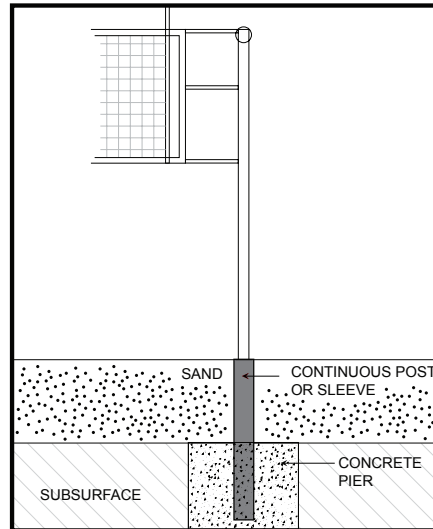

Permanent Sand Net System –
anchored in a concrete pier

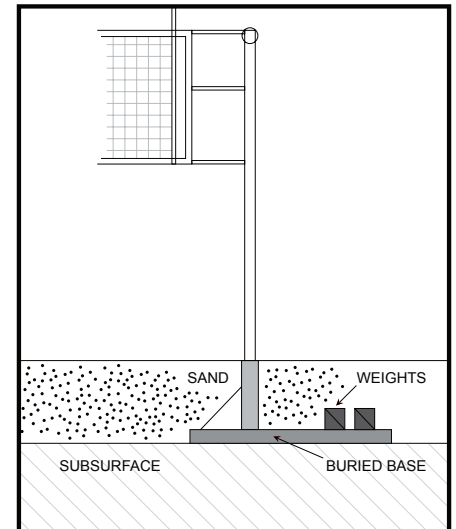

Removable Sand Net System –
anchored in a buried sled

SAND INFORMATION

- **Washed:** double washed and free of silt and clay
- **Particle size:** .5-1mm for proper drainage and safety
- **Particle shape:** sub angular to resist compaction and help with drainage
- **Color:** white resists heat
- **Source:** granite based (no calcium or limestone) remains stable in all weather
- **Tilling:** recommend routine tilling for ideal playing conditions